

3D SNAP SETUP INSTRUCTIONS



READ CAREFULLY BEFORE SETTING UP YOUR DISPLAY

Improper use will void warranty

1. Unpack your display. Place your frame on the floor vertically with the installed graphics side down.

Separate the frame a little to ensure that no graphics are caught up on any of the hardware parts.

2. Locate the center bars and hold onto them in the middle. Carefully and evenly extend the frame outwards until the frame is fully extended and the magnetic connectors join.

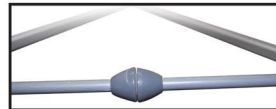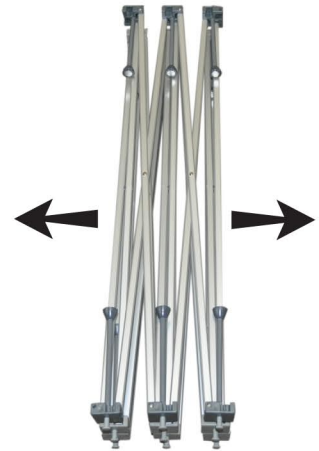

Magnetic connectors joined

3. Your Done!



DISASSEMBLING THE DISPLAY

1. To disassemble the display, you will need to pull apart the magnetic connectors at the same time. This is best done using **two people** on each end of the display.



2. Once all connectors are apart you can then slowly push down and in to close the frame.

Pack display back into provided case.